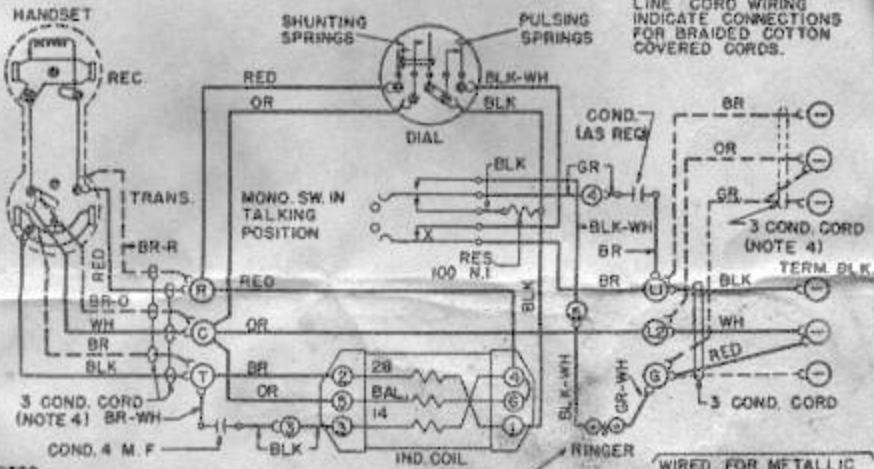


RINGER FREQ.

CODE
NO.

NOTES:

- 1-IF NO DIAL IS USED PUT BOTH BLK & BLK-WH DIAL WIRES UNDER SCREW HOLDING DIAL BLANK.
- 2-IF BELLS TAP WHEN DIALING FROM ANOTHER TELEPHONE ON THE LINE REVERSE CONNECTIONS AT TERM. 5 AND G.
- 3-"X" CONTACTS TO BREAK FIRST AND MAKE LAST.

AUTOMATIC ELECTRIC COMPANY
CHICAGO, U.S.A.

WIRED FOR METALLIC RINGING.
FOR GRD RINGING MOVE RED WIRE IN TERMINAL BLOCK FROM TERM. L2 TO 3RD TERM. TO RING FROM L2 TO GRD. REVERSE LINE WIRES. DO NOT MOVE BR. WIRE FROM L1.