

SAE 100R1AT



MEDIUM PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 1 wire braid
- Cover** : Black, oil resistant synthetic rubber
- Operating Temperature** : -40°C to +125°C




PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
11104	1/4	6.4	0.6	14.1	4.0	102.0	2750	11000
11106	3/8	9.5	0.7	18.1	5.0	127.0	2250	9000
11108	1/2	12.7	0.8	21.5	7.0	178.0	2000	8000
11110	5/8	15.9	1.0	24.7	8.0	203.0	1500	6000
11112	3/4	19.1	1.1	28.6	9.5	241.0	1250	5000
11116	1	25.4	1.4	36.6	12.0	305.0	1000	4000
11120	1 1/4	31.8	1.7	43.5	16.5	419.0	625	2500
11124	1 1/2	38.1	2.0	50.0	20.0	508.0	500	2000
11132	2	50.8	2.5	63.5	25.0	635.0	375	1500

SAE 100R2AT



HIGH PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 2 wire braids
- Cover** : Black, oil resistant synthetic rubber
- Operating Temperature** : -40°C to +125°C

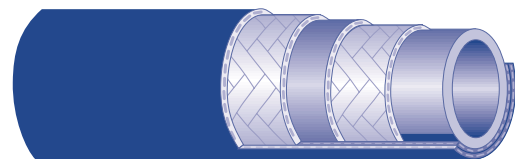

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
12104	1/4	6.4	0.6	15.7	4.0	102.0	5000	20000
12106	3/8	9.5	0.8	19.7	5.0	127.0	4000	16000
12108	1/2	12.7	0.9	23.1	7.0	178.0	3500	14000
12110	5/8	15.9	1.0	26.3	8.0	203.0	2750	11000
12112	3/4	19.1	1.2	30.2	9.5	241.0	2250	9000
12116	1	25.4	1.5	38.9	12.0	305.0	2000	8000
12120	1 1/4	31.8	1.9	48.0	16.5	419.0	1625	6500
12124	1 1/2	38.1	2.2	55.0	20.0	508.0	1250	5000
12132	2	50.8	2.6	67.0	25.0	635.0	1125	4500

DIN 2002 1SN



MEDIUM PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 1 wire braid
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +149°C




PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
22304	1/4	6.4	0.6	14.1	3.9	100.0	3250	13050
22306	3/8	9.5	0.7	18.1	5.1	130.0	2600	10450
22308	1/2	12.7	0.8	21.4	7.1	180.0	2300	9300
22310	5/8	15.9	1.0	24.5	7.9	200.0	1900	7550
22312	3/4	19.1	1.1	28.5	9.4	240.0	1500	6000
22316	1	25.4	1.4	36.6	11.8	300.0	1300	5200
22320	1 1/4	31.8	1.8	44.8	16.5	420.0	900	3650
22324	1 1/2	38.1	2.1	52.1	19.7	500.0	725	2900
22332	2	50.8	2.6	65.5	24.8	630.0	580	2300

SAE 100R7

MEDIUM PRESSURE THERMOPLASTIC HOSE

- Tube** : Thermoplastic technopolymer
- Reinforcement** : 2 polyester fibre braids
- Cover** : Blue thermoplastic technopolymer
- Operating Temperature** : -40°C to +93°C

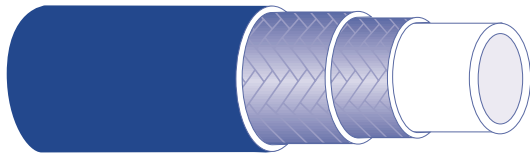

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
17502	1/8	3.3	0.3	8.5	1.2	30.0	3340	13340
17503	3/16	4.8	0.4	10.0	1.4	35.0	3045	12180
17504	1/4	6.4	0.5	11.8	2.0	50.0	2900	11600
17505	5/16	8.0	0.6	14.3	2.2	55.0	2710	14500
17506	3/8	9.5	0.6	16.0	3.0	75.0	2535	10150
17508	1/2	12.7	0.8	20.3	3.7	95.0	2030	8120
17510	5/8	16.0	0.9	23.5	4.9	125.0	1520	6090
17512	3/4	19.0	1.0	26.5	5.9	150.0	1260	5075
17516	1	25.4	1.3	32.5	7.9	200.0	1015	4060

SAE 100R8

HIGH PRESSURE THERMOPLASTIC HOSE

- Tube** : Thermoplastic technopolymer
- Reinforcement** : 2 aramid fibre braids
- Cover** : Green thermoplastic technopolymer
- Operating Temperature** : -40°C to +93°C




PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
18502	1/8	3.2	0.3	7.1	1.2	30.0	5075	20300
18503	3/16	4.8	0.4	11.1	1.4	35.0	5075	20300
18504	1/4	6.4	0.5	12.3	2.0	50.0	5075	20300
18505	5/16	8.0	0.6	14.3	2.4	60.0	4710	18850
18506	3/8	9.5	0.7	16.7	3.1	80.0	4060	16240
18508	1/2	12.7	0.8	20.5	3.7	95.0	3550	14210
18510	5/8	16.0	1.0	24.5	4.9	125.0	2830	11300
18512	3/4	19.0	1.1	28.0	5.9	150.0	2350	9430
18516	1	25.4	1.4	34.7	7.9	200.0	2060	8270

SAE 100R5C

MEDIUM PRESSURE WIRE BRAID HOSE

- Tube** : Black oil resistant synthetic rubber
- Reinforcement** : 1 textile & 1 wire braid
- Cover** : Black oil resistant textile braid
- Operating Temperature** : -40°C to +121°C

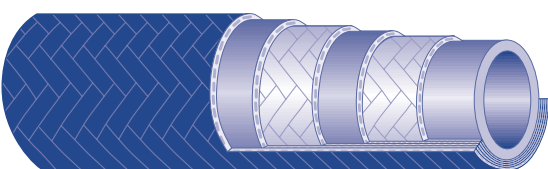


PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
15404	3/16	5.0	0.5	13.7	3.0	75.0	3000	12000
15405	1/4	6.5	0.6	15.3	3.3	85.0	3000	12000
15406	5/16	8.0	0.7	17.6	3.9	100.0	2250	9000
15408	13/32	10.5	0.8	20.0	4.5	115.0	2000	8000
15410	1/2	13.0	0.9	24.0	5.5	140.0	1750	7000
15412	5/8	16.0	1.1	28.0	6.5	165.0	1500	6000
15416	7/8	22.0	1.3	32.2	7.3	185.0	800	3200
15420	1 1/8	29.0	1.5	38.9	9.1	230.0	650	2600
15424	1 3/8	35.0	1.8	45.2	10.4	265.0	500	2000
15432	1 13/16	46.0	2.3	57.6	13.2	335.0	360	1440

SAE 100R9AT



PULSATING PRESSURE SPIRAL WIRE HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 4 spiral wires
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +149°C

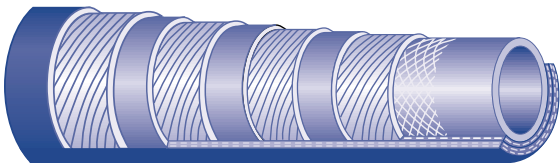


PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
11906	3/8	9.5	0.9	22.2	4.9	125.0	4500	18000
11908	1/2	12.7	1.0	25.4	7.1	180.0	4000	16000
11910	5/8	15.9	1.1	29.0	9.8	250.0	3625	14500
11912	3/4	19.1	1.3	32.2	9.4	240.0	3000	12000
11916	1	25.4	1.6	40.9	12.0	305.0	3000	12000

MEET SAE 100R12 PRESSURE



PULSATING HIGH PRESSURE SPIRAL WIRE HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 4 spiral wires
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +121°C

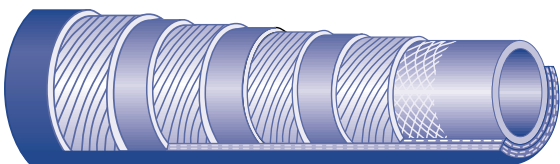


PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
39106	3/8	9.5	0.8	21.0	4.9	125.0	4000	16000
39108	1/2	12.7	1.0	24.6	7.1	180.0	4000	16000
39110	5/8	15.9	1.1	29.0	9.8	250.0	4000	16000
39112	3/4	19.1	1.2	31.5	9.4	240.0	4000	16000
39116	1	25.4	1.5	39.2	12.0	305.0	4000	16000
39120	1 1/4	31.8	1.9	48.7	18.1	460.0	4000	16000
39124	1 1/2	38.1	2.2	54.7	22.0	560.0	4000	16000
39132	2	50.8	2.7	68.2	28.0	710.0	3100	12400

MEET SAE 100R13 PRESSURE



PULSATING HIGH PRESSURE SPIRAL WIRE HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 4 spiral wires
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +121°C

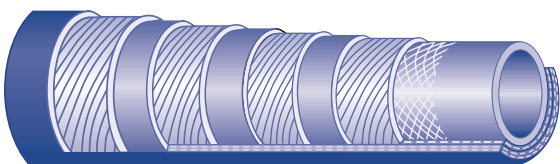


PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
39206	3/8	9.5	0.9	22.2	7.1	180.0	5000	20000
39208	1/2	12.7	1.0	25.4	9.1	230.0	5000	20000
39210	5/8	15.9	1.1	29.0	9.8	250.0	5000	20000
39212	3/4	19.1	1.3	33.0	11.8	300.0	5000	20000
39216	1	25.4	1.6	40.9	13.4	340.0	5000	20000

SAE 100R12 PRESSURE



PULSATING HIGH PRESSURE SPIRAL WIRE HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 4 spiral wires
- Cover** : Grey oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +121°C

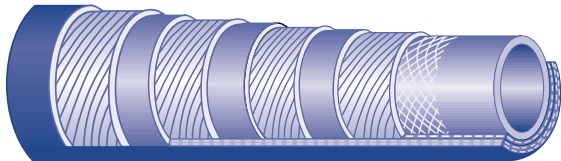


PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
12206	3/8	9.5	0.8	21.0	4.9	125.0	4000	16000
12208	1/2	12.7	1.0	24.6	7.1	180.0	4000	16000
12210	5/8	15.9	1.1	29.0	9.8	250.0	4000	16000
12212	3/4	19.1	1.2	31.5	9.4	240.0	4000	16000
12216	1	25.4	1.5	39.2	12.0	305.0	4000	16000
12220	1 1/4	31.8	1.9	48.6	16.5	420.0	3000	12000
12224	1 1/2	38.1	2.2	55.0	20.1	510.0	2500	10000
12232	2	50.8	2.7	68.3	25.0	635.0	2500	10000

DIN 20023 4SP



PULSATING HIGH PRESSURE SPIRAL WIRE HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 4 spiral wires
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +121°C

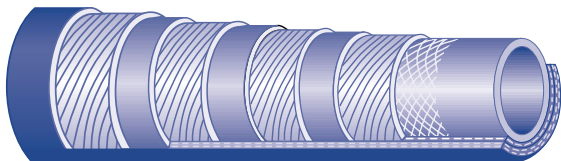


PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
23506	3/8	9.5	0.9	22.2	7.1	180.0	6450	25800
23508	1/2	12.7	1.0	25.4	9.1	230.0	6020	24070
23510	5/8	15.9	1.1	29.0	9.8	250.0	5075	20300
23512	3/4	19.1	1.3	33.0	11.8	300.0	5075	20300
23516	1	25.4	1.6	40.9	13.4	340.0	4060	16200
23520	1 1/4	31.8	2.1	52.4	18.1	460.0	3045	12000
23524	1 1/2	38.1	2.3	58.8	22.0	560.0	2680	10700
23532	2	50.8	2.8	71.4	26.0	660.0	2500	10000

DIN 20023 4SH



PULSATING HIGH PRESSURE SPIRAL WIRE HOSE

- Tube** : Black oil resistant synthetic rubber
- Reinforcement** : 4 spiral wires
- Cover** : Rusty brown, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +121°C

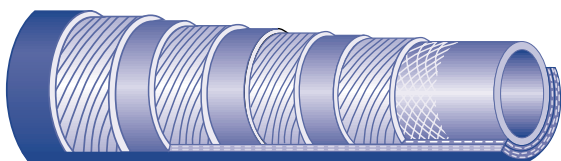


PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
23610	5/8	15.9	1.1	29.0	9.8	250.0	6525	26100
23612	3/4	19.1	1.3	33.0	11.0	280.0	6090	24360
23616	1	25.4	1.6	39.9	13.4	340.0	5510	22040
23620	1 1/4	31.8	1.9	47.1	18.1	460.0	4715	18850
23624	1 1/2	38.1	2.2	55.1	22.0	560.0	4205	16820
23632	2	50.8	2.7	69.7	27.6	700.0	3625	14500

SAE 100R13 PRESSURE



PULSATING HIGH PRESSURE SPIRAL WIRE HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 4-6 spiral wires
- Cover** : Rusty brown, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +121°C

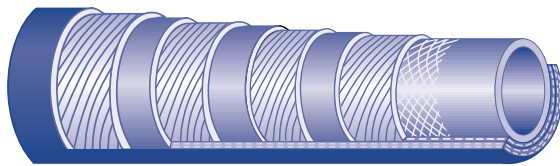

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
12312	3/4	19.1	1.3	33.7	9.4	240.0	5000	20000
12316	1	25.4	1.6	40.3	12.0	305.0	5000	20000
12320	1 1/4	31.8	2.0	52.0	16.5	420.0	5000	20000
12324	1 1/2	38.1	2.3	59.5	20.1	510.0	5000	20000
12332	2	50.8	2.9	73.4	25.0	635.0	5000	20000

MULTI-PURPOSE HOSE



LOW PRESSURE TEXTILE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : High strength synthetic textile braid
- Cover** : Red, oil resistant synthetic rubber
- Operating Temperature** : -40°C to +120°C



PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
31204	1/4	6.4	0.6	14.0	1.6	40.0	300	900
31206	3/8	9.5	0.8	20.0	2.4	60.0	300	900
31208	1/2	12.7	0.9	23.0	3.1	80.0	300	900
31210	5/8	15.9	1.1	27.0	3.9	100.0	300	900
31212	3/4	19.1	1.2	30.0	4.3	110.0	300	900
31216	1	25.4	1.4	36.0	6.0	157.0	300	900
31220	1 1/4	31.8	1.8	45.0	10.6	270.0	200	600
31224	1 1/2	38.1	2.1	53.0	12.6	320.0	200	600

PTFE FLEXIBLE HOSE



MULTI-PURPOSE PTFE FLEXIBLE HOSE

- Tube** : Smooth bore PTFE
- Cover** : 1 stainless steel wire braid
- Operating Temperature** : -55°C to +260°C




PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
43202	1/8	3.4	0.3	6.7	1.0	25.0	3990	15960
43203	3/16	5.1	0.3	8.1	1.4	35.0	2900	11600
43204	1/4	6.7	0.4	9.7	1.8	45.0	2540	10160
43205	5/16	8.4	0.5	11.6	2.0	50.0	2175	8700
43206	3/8	10.0	0.5	13.2	2.2	55.0	1960	7840
43207	13/32	10.3	0.6	14.1	2.6	65.0	1890	7560
43208	1/2	13.4	0.6	16.5	2.8	70.0	1740	6960
43210	5/8	16.6	0.8	20.1	5.1	130.0	1600	6400
43212	3/4	19.8	0.9	23.3	7.5	190.0	1300	5200
43214	7/8	22.1	1.1	26.9	9.8	250.0	1020	4080
43216	1	25.4	1.2	30.5	10.6	270.0	940	3760

DIN 20022 2SN



HIGH PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 2 wire braids
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +149°C

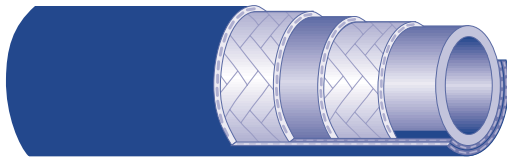

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
22404	1/4	6.4	0.6	15.7	3.9	100.0	5800	23200
22406	3/8	9.5	0.8	19.7	5.1	130.0	4800	19150
22408	1/2	12.7	0.9	23.0	7.1	180.0	4000	15950
22410	5/8	15.9	1.0	26.2	7.9	200.0	3600	14500
22412	3/4	19.1	1.2	30.1	9.4	240.0	3100	12350
22416	1	25.4	1.5	38.9	11.8	300.0	2400	9450
22420	1 1/4	31.8	1.9	49.5	16.5	420.0	1800	7250
22424	1 1/2	38.1	2.2	55.9	19.7	500.0	1300	5250
22432	2	50.8	2.7	68.6	24.8	630.0	1150	4650

MEET SAE 100R2 PRESSURE



HIGH PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 1 wire braid
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +125°C




PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
33804	1/4	6.4	0.6	14.0	3.0	76.0	5000	20000
33806	3/8	9.5	0.7	17.5	3.5	89.0	4000	16000
33808	1/2	12.7	0.8	21.0	5.1	130.0	3500	14000
33810	5/8	15.9	0.9	24.0	5.9	150.0	2750	11000
33812	3/4	19.1	1.1	28.0	7.0	178.0	2250	9000
33816	1	25.4	1.4	36.0	9.0	229.0	2000	8000
33820	1 1/4	31.8	1.7	43.5	12.4	315.0	1625	6500
33824	1 1/2	38.1	2.0	50.0	15.0	381.0	1250	5000
33832	2	50.8	2.5	63.5	20.0	508.0	1125	4500

EXCEED SAE 100R9 PRESSURE



HEAVY DUTY HIGH PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 2 wire braids
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +125°C

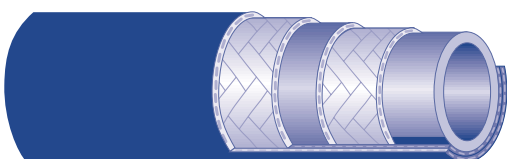

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
33904	1/4	6.4	0.6	15.5	4.0	102.0	6350	25400
33906	3/8	9.5	0.8	19.5	5.0	127.0	5500	22000
33908	1/2	12.7	0.9	22.5	5.9	150.0	5500	22000
33910	5/8	15.9	1.0	25.5	7.5	190.0	5000	20000
33912	3/4	19.1	1.2	29.5	9.1	230.0	4500	18000
33916	1	25.4	1.5	38.0	11.8	300.0	3500	14000
33920	1 1/4	31.8	1.9	48.0	15.0	380.0	3000	12000
33924	1 1/2	38.1	2.2	55.0	18.0	457.2	2500	10000
33932	2	50.8	2.6	67.0	24.0	609.6	2500	10000

550 HEAVY-DUTY WATER SUCTION AND DELIVERY HOSE




HEAVY-DUTY WATER SUCTION AND DELIVERY HOSE

- Tube** : Black, smooth synthetic rubber resistant to water with PH value 5 to 8
- Reinforcement** : High strength synthetic cord plus helix wire
- Cover** : Black, smooth (wrapped finish) synthetic rubber, abrasion and weathering resistant
- Operating Temperature** : -35°C to +70°C

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	THEORETICAL B. P (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
55016	1	25	1 ³ / ₈	35	4	100.0	150	450
55020	1 1/4	32	1 ²¹ / ₃₂	42	5	130.0	150	450
55024	1 1/2	38	1 ¹⁵ / ₁₆	49	6	150.0	150	450
55032	2	51	2 ¹⁵ / ₃₂	63	8	200.0	150	450
55040	2 1/2	63.5	3 ¹ / ₃₂	75	11	270.0	150	450
55048	3	76	3 ¹ / ₂	88	13	340.0	150	450
55056	3 1/2	90	4 ¹ / ₃₂	104	18	450.0	150	450
55064	4	102	4 ⁹ / ₁₆	116	20	510.0	150	450
55080	5	127	5 ⁵ / ₈	145	25	625.0	150	450
55096	6	152	6 ³ / ₄	173	33	835.0	150	450
550128	8	203	8 ¹⁵ / ₁₆	228	55	1,400.0	150	450
550160	10	254	11 ¹ / ₈	283	79	2,000.0	150	450
550192	12	305	13 ¹¹ / ₃₂	339	96	2,430.0	150	450

* Other sizes are available on request.

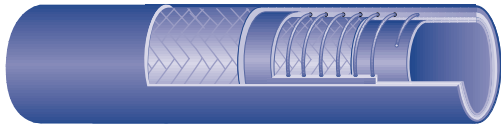

571 TANK TRUCK HOSE, OIL SUCTION AND DELIVERY HOSE



WITHSTANDS FULL VACUUM. USED FOR A WIDE RANGE OF PETROLEUM PRODUCTS UP TO 30% AROMATIC CONTENT

- Tube** : Black, smooth nitrile compound
- Reinforcement** : High strength synthetic cord plus helix wire and anti-static copper wire
- Cover** : Black, smooth (wrapped finish) high grade chloroprene rubber, compounded for an excellent resistance to weather, ozone, abrasion and oil
- Operating Temperature** : -15°C to +70°C

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	THEORETICAL B. P (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
57112	3/4	19	1 ⁹ / ₆₄	29	4	100.0	150	450
57116	1	25	1 ³ / ₈	35	6	150.0	150	450
57120	1 1/4	32	1 ¹¹ / ₁₆	43	8	200.0	150	450
57124	1 1/2	38	1 ³¹ / ₃₂	50	10	250.0	150	450
57132	2	51	2 ¹ / ₂	63	13	330.0	150	450
57140	2 1/2	63	3 ¹ / ₃₂	77	16	400.0	150	450
57148	3	76	3 ¹⁹ / ₃₂	91	20	500.0	150	450
57164	4	102	4 ¹¹ / ₁₆	119	28	700.0	150	450
57180	5	127	5 ²⁵ / ₃₂	147	39	1,000.0	150	450
57196	6	152	6 ²⁷ / ₃₂	174	47	1,200.0	150	450
571128	8	203	9	228	60	1,500.0	150	450

* Other sizes are available on request.




585 HEAVY-DUTY STEAM HOSE



STEAM HOSE FOR 210°C (410°F) WIRE REINFORCED

- Tube** : Black, smooth epdm rubber specially compounded to withstand superheated steam
- Reinforcement** : plies of steel wire cord
- Cover** : Black, smooth (wrapped finish) epdm rubber with excellent resistant to high temperature, weathering, abrasion and ageing; it is pin-pricked to prevent separation
- Operating Temperature** : -40°C to +210°C

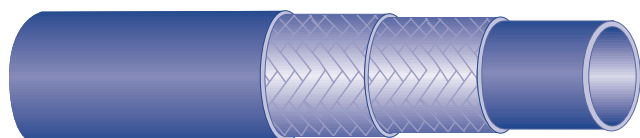

PRODUCT CODE	HOSE BORE		HOSE O.D.		MAX.W.P. (PSI)	THEORETICAL B.P (PSI)
	(IN)	(MM)	(IN)	(MM)		
58508	1/2	13	1	25	250	2,500
58510	5/8	16	1 ³ / ₃₂	28	250	2,500
58512	3/4	19	1 ⁷ / ₃₂	31	250	2,500
58516	1	25	1 ²⁹ / ₆₄	37	250	2,500
58520	1 ¹ / ₄	32	1 ¹³ / ₁₆	46	250	2,500
58524	1 ¹ / ₂	38	2 ¹ / ₈	54	250	2,500
58532	2	51	2 ⁴¹ / ₆₄	67	250	2,500
58540	2 ¹ / ₂	63.5	3 ⁵ / ₁₆	84	250	2,500
58548	3	76	3 ¹³ / ₁₆	97	250	2,500
58564	4	102	4 ⁷ / ₈	124	250	2,500

* Other sizes are available on request.

561 FUEL & OIL DELIVERY HOSE



USED FOR DELIVERY AND TRANSFER OF A WIDE RANGE OF PETROLEUM PRODUCTS UP TO 30% AROMATIC CONTENT AND UP TO A MAXIMUM WORKING TEMPERATURE OF +70° C

- Tube** : Black, smooth, nitrile rubber compound
- Reinforcement** : High strength synthetic cord plus anti-static copper wires
- Cover** : Black, smooth (wrapped finish) high grade chloroprene rubber compounded for an excellent resistant to weather, ozone, abrasion and oil
- Operating Temperature** : -15°C to +70°C



PRODUCT CODE	HOSE BORE		HOSE O.D.		MAX.W.P. (PSI)	THEORETICAL B.P (PSI)
	(IN)	(MM)	(IN)	(MM)		
56108	1/2	13	1 ³ / ₁₆	20	150	450
56110	5/8	16	1 ¹ / ₆₄	26	150	450
56112	3/4	19	1 ¹ / ₁₆	27	150	450
56116	1	25	1 ¹³ / ₃₂	36	150	450
56120	1 ¹ / ₄	32	1 ⁴⁷ / ₆₄	44	150	450
56124	1 ¹ / ₂	38	1 ³¹ / ₃₂	50	150	450
56132	2	51	2 ¹ / ₂	63	150	450
56140	2 ¹ / ₂	63	2 ⁵⁹ / ₆₄	74	150	450
56148	3	76	3 ¹ / ₂	89	150	450
56164	4	102	4 ²¹ / ₃₂	118	150	450
56196	6	152	6 ³⁹ / ₆₄	168	150	450
561128	8	203	8 ¹³ / ₁₆	224	150	450

* Other sizes are available on request.