

SAE 100R1AT



MEDIUM PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 1 wire braid
- Cover** : Black, oil resistant synthetic rubber
- Operating Temperature** : -40°C to +125°C




PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
11104	1/4	6.4	0.6	14.1	4.0	102.0	2750	11000
11106	3/8	9.5	0.7	18.1	5.0	127.0	2250	9000
11108	1/2	12.7	0.8	21.5	7.0	178.0	2000	8000
11110	5/8	15.9	1.0	24.7	8.0	203.0	1500	6000
11112	3/4	19.1	1.1	28.6	9.5	241.0	1250	5000
11116	1	25.4	1.4	36.6	12.0	305.0	1000	4000
11120	1 1/4	31.8	1.7	43.5	16.5	419.0	625	2500
11124	1 1/2	38.1	2.0	50.0	20.0	508.0	500	2000
11132	2	50.8	2.5	63.5	25.0	635.0	375	1500

SAE 100R2AT



HIGH PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 2 wire braids
- Cover** : Black, oil resistant synthetic rubber
- Operating Temperature** : -40°C to +125°C

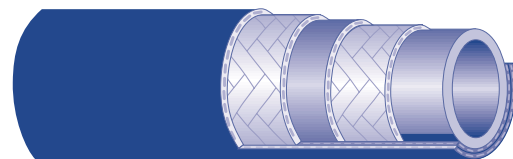

PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
12104	1/4	6.4	0.6	15.7	4.0	102.0	5000	20000
12106	3/8	9.5	0.8	19.7	5.0	127.0	4000	16000
12108	1/2	12.7	0.9	23.1	7.0	178.0	3500	14000
12110	5/8	15.9	1.0	26.3	8.0	203.0	2750	11000
12112	3/4	19.1	1.2	30.2	9.5	241.0	2250	9000
12116	1	25.4	1.5	38.9	12.0	305.0	2000	8000
12120	1 1/4	31.8	1.9	48.0	16.5	419.0	1625	6500
12124	1 1/2	38.1	2.2	55.0	20.0	508.0	1250	5000
12132	2	50.8	2.6	67.0	25.0	635.0	1125	4500

DIN 2002 1SN



MEDIUM PRESSURE WIRE BRAID HOSE

- Tube** : Black, oil resistant synthetic rubber
- Reinforcement** : 1 wire braid
- Cover** : Black, oil resistant synthetic rubber, pin-perforated
- Operating Temperature** : -40°C to +149°C



PRODUCT CODE	HOSE BORE		HOSE O.D.		BEND RADIUS		MAX.W.P. (PSI)	MIN.B.P. (PSI)
	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)		
22304	1/4	6.4	0.6	14.1	3.9	100.0	3250	13050
22306	3/8	9.5	0.7	18.1	5.1	130.0	2600	10450
22308	1/2	12.7	0.8	21.4	7.1	180.0	2300	9300
22310	5/8	15.9	1.0	24.5	7.9	200.0	1900	7550
22312	3/4	19.1	1.1	28.5	9.4	240.0	1500	6000
22316	1	25.4	1.4	36.6	11.8	300.0	1300	5200
22320	1 1/4	31.8	1.8	44.8	16.5	420.0	900	3650
22324	1 1/2	38.1	2.1	52.1	19.7	500.0	725	2900
22332	2	50.8	2.6	65.5	24.8	630.0	580	2300